

Project _____

Item No. _____

Quantity _____

36-INCH PLANCHA



PERFORMANCE

The CookTek® 36-inch Plancha boasts a durable stainless steel design, available with a polished steel or chrome surface top and is intended for back-of-the-house applications in commercial kitchens and restaurants. With two independent 7,000-watt induction zones, two integral grease drawers, and low radiant heat emission, the Plancha is ideal for a wide variety of food products. The Plancha has instantaneous recovery and the fastest start-up times in the industry.


350°F < 5 mins

500°F < 9 mins



FEATURES

- Available in 14,000 watts (7,000 watts per zone)
- Stainless steel housing with easy-to-clean polished steel or chrome surface top (half-grooved top available)
- Two control knobs with 10 temperature settings
- Low radiant heat provides for a comfortable kitchen environment
- Grease moat surrounds the entire cooking surface keeping the sides of the unit cool to the touch, and empties into two convenient removable drawers
- Near instantaneous recovery for consistent temperatures cook to cook
- Ability to set two zones at different, constant temperatures
- Microprocessor monitors vital components to check for overheating, power supply issues, and more
- Automatic shut-off feature prohibits internal overheating
- Advanced cooling system provides best in class internal component temperatures
- Integral fans keep internal components cool
- Available in 200-240V and 380-415V, 3 phase
- One-year field-service warranty – U.S. and Canada only

CERTIFICATIONS

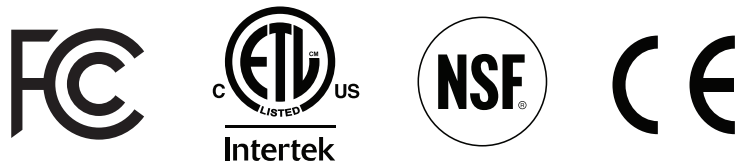

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

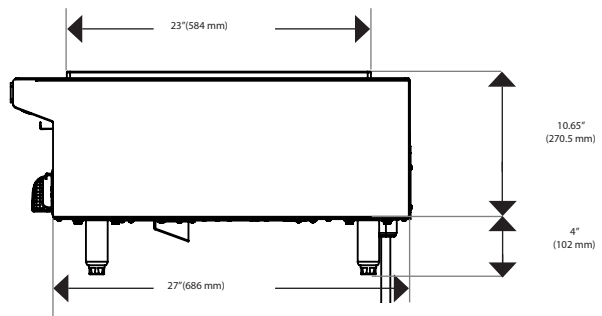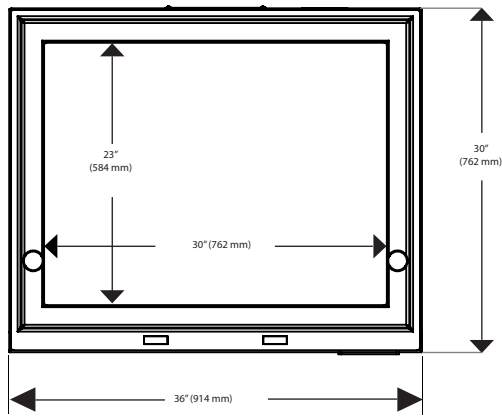

DIMENSIONS		
Full Unit Height	14.65"	372 mm
Full Unit Width	36"	914 mm
Full Unit Depth	30"	762 mm
Cooking Surface Width	30"	762 mm
Cooking Surface Depth	23"	584 mm
Unit Footprint	27"	686 mm
Weight	160 lb.	72.6 kg
CLEARANCE		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm
Below	The space between unit legs should be kept free from obstruction.	
COOLING REQUIREMENTS AND SPECIFICATIONS		
Max Ambient Temperature	122°F	50°C
INTERNAL COOLING FAN DISPLACEMENT		
208 V Models	140 CFM (3.9m ³ /min)	
SHIPPING INFORMATION		
Packaged Height	19"	483 mm
Packaged Width	42"	1067 mm
Packaged Depth	40"	1016 mm
Packaged Weight	170 lb.	77 kg
Item Class	250 NMFC #26710	
SHORT FORM SPECIFICATIONS		
CookTek 36" Plancha has a 23" (584 mm) X 30" (762 mm) Chrome or Steel cooking surface with (2)7000 watt cooking zones, totalling 14,000 watts. Each cooking zone can support different and consistent cooking temperatures. The unit comes with a 4-sided grease moat		

CODE	DESCRIPTION	
CR	Chrome	
CRG	Chrome/Half Grooved	
CS	Steel	
CSG	Steel/Half Grooved	
ELECTRICAL SPECIFICATIONS (3-PHASE)		
UNITED STATES/CANADA		
PL362CR-200/240	680101	208/240V, 14kW, 39A, 50/60Hz
PL362CRG-200/240	680201	208/240V, 14kW, 39A, 50/60Hz
PL362CS-200/240	680301	208/240V, 14kW, 39A, 50/60Hz
PL362CSG-200	680401	208/240V, 14kW, 39A, 50/60Hz
UK AND SAUDI ARABIA		
PL362CR-400	681102	380-415V, 14kW, 20.5A, 50/60Hz
PL362CRG-400	681202	380-415V, 14kW, 20.5A, 50/60Hz
PL362CS-400	681302	380-415V, 14kW, 20.5A, 50/60Hz
PL362CSG-400	681402	380-415V, 14kW, 20.5A, 50/60Hz
INTERNATIONAL		
PL362CR-400	681103	380-415V, 14kW, 20.5A, 50/60Hz
PL362CRG-400	681203	380-415V, 14kW, 20.5A, 50/60Hz
PL362CS-400	681303	380-415V, 14kW, 20.5A, 50/60Hz
PL362CSG-400	681403	380-415V, 14kW, 20.5A, 50/60Hz
AUSTRALIA		
PL362CR-400	681104	380-415V, 14kW, 20.5A, 50/60Hz
PL362CRG-400	681204	380-415V, 14kW, 20.5A, 50/60Hz
PL362CS-400	681304	380-415V, 14kW, 20.5A, 50/60Hz
PL362CSG-400	681404	380-415V, 14kW, 20.5A, 50/60Hz
JAPAN		
PL362CR-400	680106	200-240 V, 14kW, 39A, 50/60Hz
PL362CRG-400	680206	200-240 V, 14kW, 39A, 50/60Hz
PL362CS-400	680306	200-240 V, 14kW, 39A, 50/60Hz
PL362CSG-400	680406	200-240 V, 14kW, 39A, 50/60Hz
SOUTH AFRICA		
PL362CR-400	681107	380-415V, 14kW, 20.5A, 50/60Hz
PL362CRG-400	681207	380-415V, 14kW, 20.5A, 50/60Hz
PL362CS-400	681307	380-415V, 14kW, 20.5A, 50/60Hz
PL362CSG-400	681407	380-415V, 14kW, 20.5A, 50/60Hz
ISRAEL		
PL362CR-400	681108	380-415V, 14kW, 20.5A, 50/60Hz
PL362CRG-400	681208	380-415V, 14kW, 20.5A, 50/60Hz
PL362CS-400	681308	380-415V, 14kW, 20.5A, 50/60Hz
PL362CSG-400	681408	380-415V, 14kW, 20.5A, 50/60Hz

Global Operations
 2801 Trade Center Drive / Carrollton, Texas 75007 USA
 US: 800.90TURBO (800.908.8726) / International: +1 214.379.6000
 Fax: +1 214.379.6073 / www.cooktek.com

† CONFIGURATION DOES NOT INCLUDE A CORD OR PLUG.

 Dedicated circuit required for each installation.