

## INDUCTION WOK with Helios Controls



### HELIOS

Helios, CookTek's new enhanced user interface, provides improved reliability and more precise cooking controls. The capacitive touch control includes power percentage or temperature display options.

#### FEATURES

- Models available in 1800\*, 2500, 3500 watts
- Available in 100-120 VAC or 200-240 VAC, single phase
- Portable design with stainless steel housing
- High-quality internal electronics and heavy gauge Litz wire
- Easy-to-clean high temperature glass-ceramic top
- Automatic pan detection allows for instant energy transmission to pan
- 4.3" capacitive touch display
- Even heat distribution across bottom of cookware\*
- Temperature range from 85°F–425°F (29°C–218°C)
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle ensure air intake is cleaner and cooler
- Sloped front panel allows for easy viewing and operation
- Microprocessor monitors vital components to check for overheating, power supply issues, and more

#### INCLUDED

- Two-year advanced replacement warranty – U.S. and Canada
- Integral fan to keep internal components cool
- Standard Cat 5e or Cat 6 patch cable from unit to control box
- Plug and cord (6 ft. nominal)



#### CERTIFICATIONS



\*U.S. only

\*\*Induction cooking requires the use of induction compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

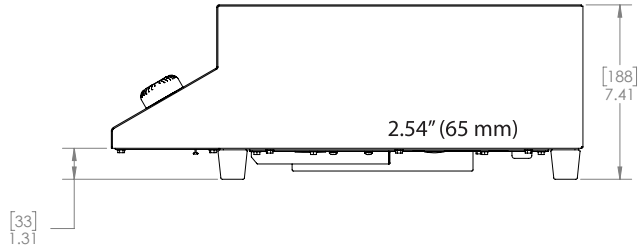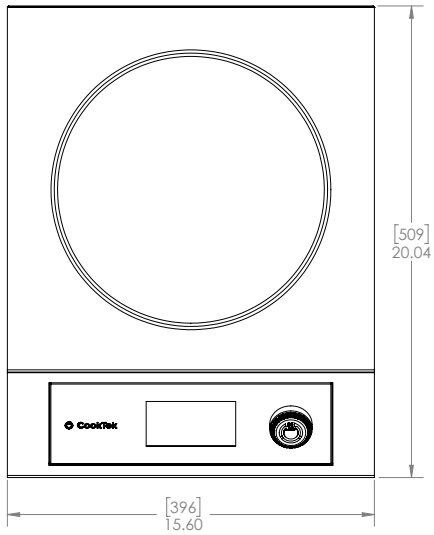

DIMENSIONS		
Height	7.41"	188 mm
Width	15.60"	396 mm
Depth	17.25"	438 mm
Bowl Width	11.75" ø	298 mm ø
Bowl Vertical Depth	2.54"	65 mm
Feet Height	1.31"	33 mm
Weight	22 lb.	9.98 kg
Max Ambient Temperature	122°F	50°C
WALL CLEARANCE		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm

SHIPPING INFORMATION		
Packaged Height	13"	330 mm
Packaged Width	23"	584 mm
Packaged Depth	24"	610 mm
Packaged Weight	27 lb.	12.2 kg
Item Class	250 NMFC #26710	



NEMA 5-15P



AS/NZS 3112:2000,  
10A, 250V



NEMA 6-20P



AS/NZS 3112:2000,  
15A, 250V



BS1363



BS 546, 16A, 250V



IEC 309, 16A, 3-pin



CEE 7/7 Schuko



SI 32, 16A, 250V

ELECTRICAL SPECIFICATIONS (SINGLE PHASE)			
UNITED STATES/CANADA			
HTF-9500-WK18-1	Freestanding, Wok, 1800W, 120V	NEMA 5-15P	
HTF-9500-WK25-1	Freestanding, Wok, 2500W, 240V	NEMA 6-20P	
HTF-9500-WK35-1	Freestanding, Wok, 3500W, 240V		
UK AND SAUDI ARABIA			
HTF-9500-WK25-2	Freestanding, Wok, 2500W, 240V	BS1363 13A, 230V	
HTF-9500-WK35-2	Freestanding, Wok, 3500W, 240V	IEC 309 16A, 3-pin	
INTERNATIONAL			
HTF-9500-WK25-3	Freestanding, Wok, 2500W, 240V	CEE 7/7 Schuko 16A, 250V	
HTF-9500-WK35-3	Freestanding, Wok, 3500W, 240V		
AUSTRALIA			
HTF-9500-WK25-4	Freestanding, Wok, 2500W, 240V	AS/NZS 3112:2000 15A, 250V	
HTF-9500-WK35-4	Freestanding, Wok, 3500W, 240V		
JAPAN			
HTF-9500-WK25-6	Freestanding, Wok, 2500W, 240V		
HTF-9500-WK35-6	Freestanding, Wok, 3500W, 240V		
SOUTH AFRICA			
HTF-9500-WK25-7	Freestanding, Wok, 2500W, 240V	BS 546 16A, 250V	
HTF-9500-WK35-7	Freestanding, Wok, 3500W, 240V		
ISRAEL			
HTF-9500-WK25-8	Freestanding, Wok, 2500W, 240V	SI 32 16A, 250V	
HTF-9500-WK35-8	Freestanding, Wok, 3500W, 240V		



Dedicated circuit required for each installation