

FRONT TO BACK DOUBLE HOB INDUCTION COOKTOP



NON-TOUCH DISPLAY



HELIOS STANDARD, FREESTANDING



HELIOS STANDARD, DROP-IN

TOUCH DISPLAY



HELIOS TOUCH, FREESTANDING

FEATURES

- 2500 watts and 3500 watts
- Available in 200-240V, single phase
- Freestanding or drop-in design with stainless steel housing
- Front to back orientation
- Sloped front panel allows on freestanding design
- Helios Standard or Helios Touch display options for freestanding design
- High-quality internal electronics and heavy gauge Litz wire
- Easy-to-clean high temperature glass-ceramic top
- 4.3" display
- Even heat distribution across bottom of cookware*
- Temperature range from 85°F–425°F (29°C–218°C)
- Automatic pan detection allows for instant energy transmission to pan
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle ensure air intake is cleaner and cooler
- Microprocessor monitors vital components to check for overheating, power supply issues, and more

INCLUDED

- Two-year advanced replacement warranty – U.S. and Canada
- Integral fan to keep internal components cool
- Standard Cat 5e or Cat 6 patch cable from unit to control box
- Plug and cord (6 ft. nominal)



CERTIFICATIONS






*Induction cooking requires the use of induction-compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.



**HELIOS STANDARD
FREESTANDING**

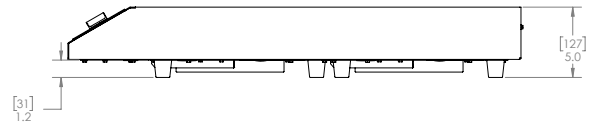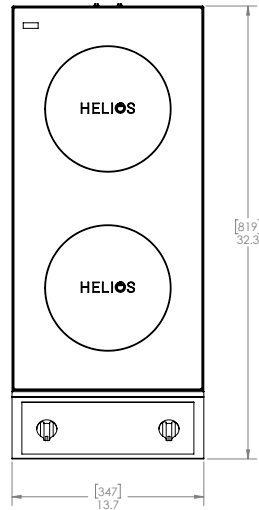

**HELIOS STANDARD
DROP-IN**

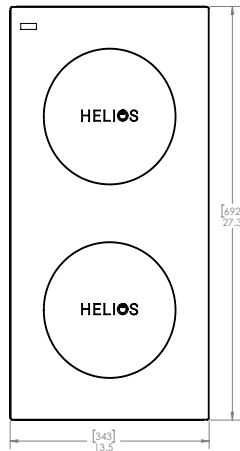

**HELIOS TOUCH
FREESTANDING**

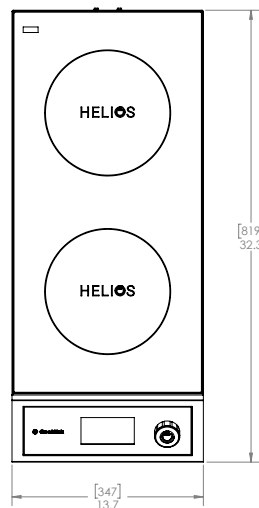

DIMENSIONS - HELIOS STANDARD FREESTANDING		
Full Unit Height	5"	127 mm
Full Unit Width	13.7"	347 mm
Full Unit Depth	32.3"	819 mm
Feet Height	1.2"	31 mm
Weight	31 lb.	14 kg
Max Ambient Temperature	122°F	50°C
WALL CLEARANCE*		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm

DIMENSIONS - HELIOS STANDARD DROP-IN		
Full Unit Height	3.7"	95 mm
Full Unit Width	13.5"	343 mm
Housing Width	12.8"	324 mm
Full Unit Depth	27.3"	692 mm
Housing Depth	26.5"	673 mm
Cutout Width	13.13"	334 mm
Cutout Depth	26.88"	683 mm
Weight	30 lb.	13.6 kg
Max Ambient Temperature	122°F	50°C
WALL CLEARANCE*		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm

DIMENSIONS - HELIOS TOUCH FREESTANDING		
Full Unit Height	5"	127 mm
Full Unit Width	13.7"	347 mm
Full Unit Depth	32.3"	819 mm
Feet Height	1.2"	31 mm
Weight	31 lb.	14 kg
Max Ambient Temperature	122°F	50°C
WALL CLEARANCE*		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm

SHIPPING INFORMATION		
Packaged Height	11"	279 mm
Packaged Width	23"	584 mm
Packaged Depth	32"	813 mm
Packaged Weight	40 lb.	18.14 kg
Item Class	250 NMFC #26710	



NEMA 6-30P



IEC 309,32A, 240V 3 Pin



NEMA 6-50P



56PA332, 32A, 250V

ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS STANDARD FREESTANDING		
UNITED STATES/CANADA		
HRF-9500-FB25-1	Freestanding, Helios Standard, 200-240V, 50/60 Hz, 2x2500W	NEMA 6-30P
HRF-9500-FB35-1	Freestanding, Helios Standard 200-240V, 50/60 Hz, 2x3500W	NEMA 6-50P
UK & SAUDI ARABIA		
HRF-9500-FB25-2	Freestanding, Helios Standard, 200-240V, 50/60 Hz, 2x2500W	IEC 309 - 3 Pin
HRF-9500-FB35-2	Freestanding, Helios Standard 200-240V, 50/60 Hz, 2x3500W	IEC 309 - 3 Pin
INTERNATIONAL		
HRF-9500-FB25-3	Freestanding, Helios Standard, 200-240V, 50/60 Hz, 2x2500W	IEC 309 - 3 Pin
HRF-9500-FB35-3	Freestanding, Helios Standard 200-240V, 50/60 Hz, 2x3500W	IEC 309 - 3 Pin
AUSTRALIA		
HRF-9500-FB25-4	Freestanding, Helios Standard, 200-240V, 50/60 Hz, 2x2500W	56PA332
HRF-9500-FB35-4	Freestanding, Helios Standard 200-240V, 50/60 Hz, 2x3500W	56PA332
JAPAN		
HRF-9500-FB25-6	Freestanding, Helios Standard, 200-240V, 50/60 Hz, 2x2500W	NEMA 5-30P
HRF-9500-FB35-6	Freestanding, Helios Standard 200-240V, 50/60 Hz, 2x3500W	NEMA 6-50P
SOUTH AFRICA		
HRF-9500-FB25-7	Freestanding, Helios Standard, 200-240V, 50/60 Hz, 2x2500W	IEC 309 - 3 Pin
HRF-9500-FB35-7	Freestanding, Helios Standard 200-240V, 50/60 Hz, 2x3500W	IEC 309 - 3 Pin
ISRAEL		
HRF-9500-FB25-8	Freestanding, Helios Standard, 200-240V, 50/60 Hz, 2x2500W	IEC 309 - 3 Pin
HRF-9500-FB35-8	Freestanding, Helios Standard 200-240V, 50/60 Hz, 2x3500W	IEC 309 - 3 Pin

ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS STANDARD DROP-IN		
UNITED STATES/CANADA		
HRD-9500-FB25-1	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 2x2500W	NEMA 6-30P
HRD-9500-FB35-1	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 2x3500W	NEMA 6-50P
UK & SAUDI ARABIA		
HRD-9500-FB25-2	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 2x2500W	IEC 309 - 3 Pin
HRD-9500-FB35-2	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 2x3500W	IEC 309 - 3 Pin
INTERNATIONAL		
HRD-9500-FB25-3	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 2x2500W	IEC 309 - 3 Pin
HRD-9500-FB35-3	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 2x3500W	IEC 309 - 3 Pin
AUSTRALIA		
HRD-9500-FB25-4	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 2x2500W	56PA332
HRD-9500-FB35-4	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 2x3500W	56PA332
JAPAN		
HRD-9500-FB25-6	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 2x2500W	NEMA 6-30P
HRD-9500-FB35-6	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 2x3500W	NEMA 6-50P
SOUTH AFRICA		
HRD-9500-FB25-7	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 2x2500W	IEC 309 - 3 Pin
HRD-9500-FB35-7	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 2x3500W	IEC 309 - 3 Pin
ISRAEL		
HRD-9500-FB25-8	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 2x2500W	IEC 309 - 3 Pin
HRD-9500-FB35-8	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 2x3500W	IEC 309 - 3 Pin


ELECTRICAL SPECIFICATIONS CONTINUED ON PAGE 4

*The provided clearances apply to a unit not placed near a heat source. Refer to the owner's manual for clearance requirements if the unit is placed near a heat source.

ELECTRICAL SPECIFICATIONS - SINGLE PHASE

HELIOS TOUCH FREESTANDING

UNITED STATES/CANADA		
HTF-9500-FB25-1	Freestanding, Helios Touch, 200–240V, 50/60 Hz, 2x2500W	NEMA 6-30P
HTF-9500-FB35-1	Freestanding, Helios Touch, 200–240V, 50/60 Hz, 2x3500W	NEMA 6-50P
UK & SAUDI ARABIA		
HTF-9500-FB25-2	Freestanding, Helios Touch, 200–240V, 50/60 Hz, 2x2500W	IEC 309 - 3 Pin
HTF-9500-FB35-2	Freestanding, Helios Touch, 200–240V, 50/60 Hz, 2x3500W	IEC 309 - 3 Pin
INTERNATIONAL		
HTF-9500-FB25-3	Freestanding, Helios Touch, 200–240V, 50/60 Hz, 2x2500W	IEC 309 - 3 Pin
HTF-9500-FB35-3	Freestanding, Helios Touch, 200–240V, 50/60 Hz, 2x3500W	IEC 309 - 3 Pin
AUSTRALIA		
HTF-9500-FB25-4	Freestanding, Helios Touch, 200–240V, 50/60 Hz, 2x2500W	56PA332
HTF-9500-FB35-4	Freestanding, Helios Touch, 200–240V, 50/60 Hz, 2x3500W	56PA332
JAPAN		
HTF-9500-FB25-6	Freestanding, Helios Touch, 200–240V, 50/60 Hz, 2x2500W	NEMA 6-30P
HTF-9500-FB35-6	Freestanding, Helios Touch, 200–240V, 50/60 Hz, 2x3500W	NEMA 6-50P
SOUTH AFRICA		
HTF-9500-FB25-7	Freestanding, Helios Touch, 200–240V, 50/60 Hz, 2x2500W	IEC 309 - 3 Pin
HTF-9500-FB35-7	Freestanding, Helios Touch, 200–240V, 50/60 Hz, 2x3500W	IEC 309 - 3 Pin
ISRAEL		
HTF-9500-FB25-8	Freestanding, Helios Touch, 200–240V, 50/60 Hz, 2x2500W	IEC 309 - 3 Pin
HTF-9500-FB35-8	Freestanding, Helios Touch, 200–240V, 50/60 Hz, 2x3500W	IEC 309 - 3 Pin

 Dedicated circuit required for each installation.