

INDUCTION WOK

NON-TOUCH DISPLAY



HELIOS STANDARD, FREESTANDING



HELIOS STANDARD, DROP-IN

TOUCH DISPLAY



HELIOS TOUCH, FREESTANDING

FEATURES

- 1800 W (US and Canada), 2500 W, and 3500 W models
- Available in 100–120 VAC or 200–240 VAC, single phase
- Freestanding or drop-in stainless-steel design
- Sloped front panel on freestanding models
- Helios Standard or Helios Touch display options (freestanding models)
- High-quality internal electronics with heavy-gauge Litz wire
- Easy-to-clean high-temperature glass-ceramic bowl
- 4.3-inch display
- Even heat distribution across the bottom of the cookware*
- Temperature ranges from 85–425 °F (29–218 °C)
- Automatic pan detection for instant energy transfer
- Automatic shut-off feature prevents overheating
- Integral grease filter and air baffle maintain cleaner, cooler air intake
- Microprocessors continuously monitor vital components for overheating, power-supply issues, and other conditions

STANDARD INCLUDED ACCESSORIES


- Two-year advanced replacement warranty (U.S. and Canada)
- Integral fan to keep internal components cool
- Standard Cat 5e or Cat 6 patch cable from unit to control box
- 6-ft (1.8 m) nominal plug and cord




*Induction cooking requires the use of induction-compatible (i.e., magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to substitute components or change specifications without prior notice.


HELIOS
STANDARD
FREESTANDING

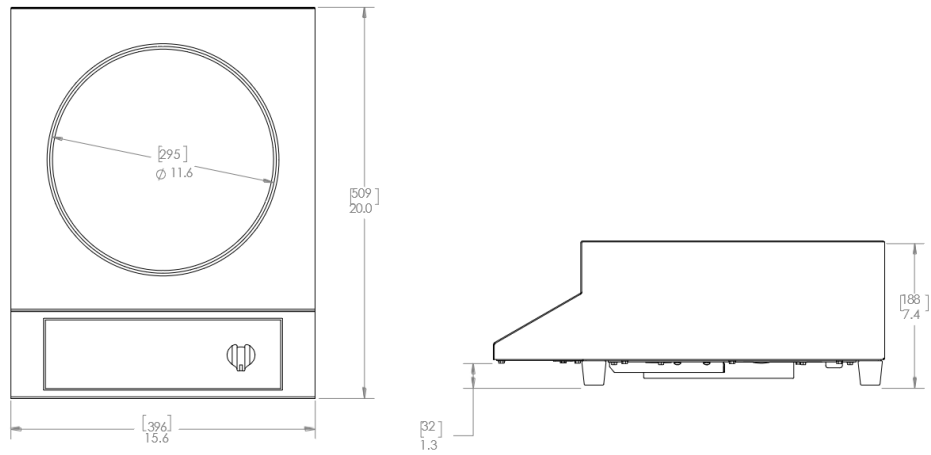

HELIOS
STANDARD
DROP-IN

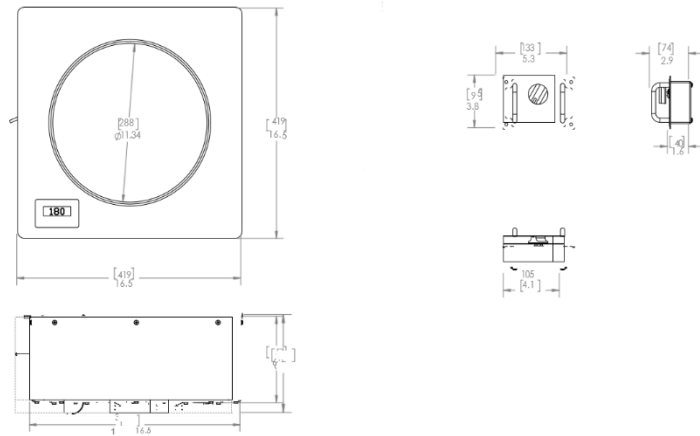

HELIOS TOUCH
FREESTANDING

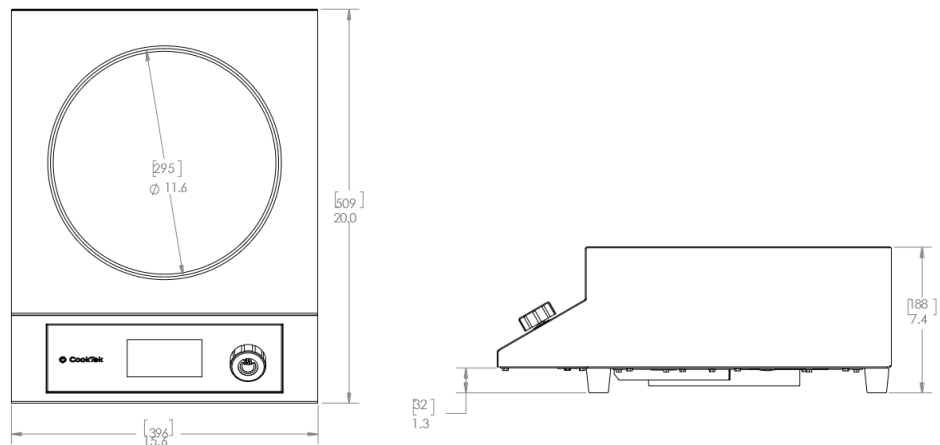

DIMENSIONS - HELIOS STANDARD FREESTANDING		
Full Unit Height	7.4"	188 mm
Full Unit Width	15.6"	396 mm
Full Unit Depth	20"	509 mm
Feet Height	1.3"	32 mm
Weight	22 lb	8.6 kg
Max Ambient Temperature	122 °F	50 °C
WALL CLEARANCE*		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm
DIMENSIONS - HELIOS STANDARD DROP-IN		
Full Unit Height	6.2"	178 mm
Full Unit Width	16.5"	419 mm
Housing Width	15.38"	391 mm
Full Unit Depth	16.5"	419 mm
Housing Depth	15.38"	391 mm
Cutout Width	15.75"	400 mm
Cutout Depth	15.75"	400 mm
Weight	22 lb	8.6 kg
Max Ambient Temperature	122 °F	50 °C
WALL CLEARANCE*		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm

*The clearances provided apply to a unit not placed near a heat source. Refer to the owner's manual for clearance requirements if the unit is placed near a heat source.

	AS/NZS 3112:2000, 10 A, 250 V		NEMA 5-15P
	AS/NZS 3112:2000, 15 A, 250 V		NEMA 6-20P
	BS 546, 16 A, 250 V		SI 32, 16 A, 250 V
	BS1363, 13 A, 230 V		
	CEE 7/7 Schuko, 16 A, 250 V		
	IEC 309, 16 A, 3-pin		

SHIPPING INFORMATION		
Packaged Height	9"	229 mm
Packaged Width	18.75"	476 mm
Packaged Depth	20.75"	527 mm
Packaged Weight	24 lb	10.9 kg
Item Class	250 NMFC #26710	

ELECTRICAL SPECIFICATIONS - SINGLE PHASE		
HELIOS STANDARD FREESTANDING		
UNITED STATES/CANADA		
HRF-9500-WK18-1	Freestanding, Helios Standard, 100–120 VAC, 50/60 Hz, 1800 W	NEMA 5-15P
HRF-9500-WK25-1	Freestanding, Helios Standard, 200–240 VAC, 50/60 Hz, 2500 W	NEMA 6-20P
HRF-9500-WK35-1	Freestanding, Helios Standard, 200–240 VAC, 50/60 Hz, 3500 W	NEMA 6-20P
UK & SAUDI ARABIA		
HRF-9500-WK25-2	Freestanding, Helios Standard, 200–240 VAC, 50/60 Hz, 2500 W	BS1363, 13 A, 230 V
HRF-9500-WK35-2	Freestanding, Helios Standard, 200–240 VAC, 50/60 Hz, 3500 W	IEC 309, 16 A, 3-pin
INTERNATIONAL		
HRF-9500-WK25-3	Freestanding, Helios Standard, 200–240 VAC, 50/60 Hz, 2500 W	CEE 7/7 Schuko, 16 A, 250 V
HRF-9500-WK35-3	Freestanding, Helios Standard, 200–240 VAC, 50/60 Hz, 3500 W	CEE 7/7 Schuko, 16 A, 250 V
AUSTRALIA		
HRF-9500-WK25-4	Freestanding, Helios Standard, 200–240 VAC, 50/60 Hz, 2500 W	AS/NZS 3112:2000, 10 A, 250 V
HRF-9500-WK35-4	Freestanding, Helios Standard, 200–240 VAC, 50/60 Hz, 3500 W	AS/NZS 3112:2000, 15 A, 250 V
JAPAN		
HRF-9500-WK25-6	Freestanding, Helios Standard, 200–240 VAC, 50/60 Hz, 2500 W	NEMA 6-20P
HRF-9500-WK35-6	Freestanding, Helios Standard, 200–240 VAC, 50/60 Hz, 3500 W	NEMA 6-20P
SOUTH AFRICA		
HRF-9500-WK25-7	Freestanding, Helios Standard, 200–240 VAC, 50/60 Hz, 2500 W	BS 546, 16 A, 250 V
HRF-9500-WK35-7	Freestanding, Helios Standard, 200–240 VAC, 50/60 Hz, 3500 W	BS 546, 16 A, 250 V

ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS STANDARD FREESTANDING		
ISRAEL		
HRF-9500-WK25-8	Freestanding, Helios Standard, 200–240 VAC, 50/60 Hz, 2500 W	SI 32, 16A, 250V
HRF-9500-WK35-8	Freestanding, Helios Standard, 200–240 VAC, 50/60 Hz, 3500 W	SI 32, 16A, 250V

ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS STANDARD DROP-IN		
UNITED STATES/CANADA		
HRD-9500-WK18-1	Drop-in, Helios Standard, 100-120 VAC, 50/60 Hz, 1800 W	NEMA 5-15P
HRD-9500-WK25-1	Drop-in, Helios Standard, 200–240 VAC, 50/60 Hz, 2500 W	NEMA 6-20P
HRD-9500-WK35-1	Drop-in, Helios Standard, 200-240 VAC, 50/60 Hz, 3500 W	NEMA 6-20P
UK & SAUDI ARABIA		
HRD-9500-WK25-2	Drop-in, Helios Standard, 200–240 VAC, 50/60 Hz, 2500 W	BS1363, 13 A, 230 V
HRD-9500-WK35-2	Drop-in, Helios Standard, 200-240 VAC, 50/60 Hz, 3500 W	IEC 309, 16 A, 3-pin
INTERNATIONAL		
HRD-9500-WK25-3	Drop-in, Helios Standard, 200–240 VAC, 50/60 Hz, 2500 W	CEE 7/7 Schuko, 16 A, 250 V
HRD-9500-WK35-3	Drop-in, Helios Standard, 200-240 VAC, 50/60 Hz, 3500 W	CEE 7/7 Schuko, 16 A, 250 V
AUSTRALIA		
HRD-9500-WK25-4	Drop-in, Helios Standard, 200–240 VAC, 50/60 Hz, 2500 W	AS/NZS 3112:2000, 10 A, 250 V
HRD-9500-WK35-4	Drop-in, Helios Standard, 200-240 VAC, 50/60 Hz, 3500 W	AS/NZS 3112:2000, 15 A, 250 V
JAPAN		
HRD-9500-WK25-6	Drop-in, Helios Standard, 200–240 VAC, 50/60 Hz, 2500 W	NEMA 6-20P
HRD-9500-WK35-6	Drop-in, Helios Standard, 200-240 VAC, 50/60 Hz, 3500 W	NEMA 6-20P
SOUTH AFRICA		
HRD-9500-WK25-7	Drop-in, Helios Standard, 200–240 VAC, 50/60 Hz, 2500 W	BS 546, 16 A, 250 V
HRD-9500-WK35-7	Drop-in, Helios Standard, 200-240 VAC, 50/60 Hz, 3500 W	BS 546, 16 A, 250V
ISRAEL		
HRD-9500-WK25-8	Drop-in, Helios Standard, 200–240 VAC, 50/60 Hz, 2500 W	SI 32, 16 A, 250V

ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS STANDARD DROP-IN		
HRD-9500-WK35-8	Drop-in, Helios Standard, 200-240 VAC, 50/60 Hz, 3500W	SI 32, 16A, 250V

ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS TOUCH FREESTANDING		
UNITED STATES/CANADA		
HTF-9500-WK18-1	Freestanding, Helios Touch, 100-120 VAC, 50/60 Hz, 1800 W	NEMA 5-15P
HTF-9500-WK25-1	Freestanding, Helios Touch, 200–240 VAC, 50/60 Hz, 2500 W	NEMA 6-20P
HTF-9500-WK35-1	Freestanding, Helios Touch, 200-240 VAC, 50/60 Hz, 3500 W	NEMA 6-20P
UK & SAUDI ARABIA		
HTF-9500-WK25-2	Freestanding, Helios Touch, 200-240 VAC, 50/60 Hz, 2500 W	BS1363, 13 A, 230 V
HTF-9500-WK35-2	Freestanding, Helios Touch, 200-240 VAC, 50/60 Hz, 3500 W	IEC 309, 16 A, 3-pin
INTERNATIONAL		
HTF-9500-WK25-3	Freestanding, Helios Touch, 200-240 VAC, 50/60 Hz, 2500 W	CEE 7/7 Schuko 16 A, 250 V
HTF-9500-WK35-3	Freestanding, Helios Touch, 200-240 VAC, 50/60 Hz, 3500 W	CEE 7/7 Schuko 16 A, 250 V
AUSTRALIA		
HTF-9500-WK25-4	Freestanding, Helios Touch, 200-240 VAC, 50/60 Hz, 2500 W	AS/NZS 3112:2000, 10 A, 250 V
HTF-9500-WK35-4	Freestanding, Helios Touch, 200-240 VAC, 50/60 Hz, 3500 W	AS/NZS 3112:2000, 15 A, 250 V
JAPAN		
HTF-9500-WK25-6	Freestanding, Helios Touch, 200-240 VAC, 50/60 Hz, 2500 W	NEMA 6-20P
HTF-9500-WK35-6	Freestanding, Helios Touch, 200-240 VAC, 50/60 Hz, 3500 W	NEMA 6-20P
SOUTH AFRICA		
HTF-9500-WK25-7	Freestanding, Helios Touch, 200-240 VAC, 50/60 Hz, 2500 W	BS 546, 16 A, 250 V
HTF-9500-WK35-7	Freestanding, Helios Touch, 200-240 VAC, 50/60 Hz, 3500 W	BS 546, 16 A, 250 V
ISRAEL		
HTF-9500-WK25-8	Freestanding, Helios Touch, 200-240 VAC, 50/60 Hz, 2500 W	SI 32, 16 A, 250 V
HTF-9500-WK35-8	Freestanding, Helios Touch, 200-240 VAC, 50/60 Hz, 3500 W	SI 32, 16 A, 250 V

⚠️ Dedicated circuit required for each installation